

# BTE-621-SP

<https://yeshearingaid.com/>

## Signature feature

- 100% Digital processing for exceptional sound quality
- 8 channels WDRC amplifier
- 8 bands frequency shaping / programming
- HiPro connect support
- Low level expansion
- Earhook design, easy operating
- Volume control
- Memory switch tone
- Low battery warning
- Low frequency cut trimmer
- MPO trimmer
- Output Compression Limiting (AGC-O)
- Low current consumption




## Technical Data

BTE-621-SP

Peak OSPL90(dB SPL)	138
OSPL90-HFA(dB SPL)	133
Peak Gain(dB)	80
HFA/FOG(dB)	70
Reference test gain(dB)	56
Frequency range(Hz)	200-5000
Distortion	%
@ 500Hz	2.0
@ 800Hz	1.0
@ 1600Hz	1.0
EQ input noise(dB)	<21
Battery Size	675A
Battery Current(mA)	1.9

## Technical Diagram

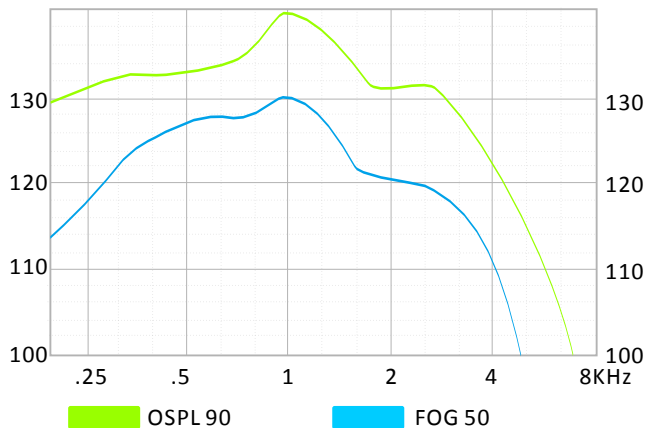

## Advantages

### Fitting software support

- Super Power
- Low cut & MPO trimmer

ANSI S3.22/2003 & IEC118-7/2005 (HA2-2CC Coupler)  
/Reference test gain: 65dB@1000Hz  
/Data may be subject to change with product refinement

## Fitting Range

